


FLAT SYNTHETIC FILTERING CELLS

VKV

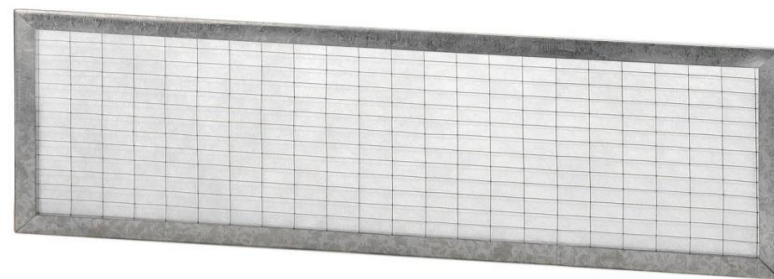

VKV

GENERALS

FILTERING CELL FOR FAN CONVECTORS WITH GALVANIZED STEEL FRAME AND POLYESTER FILTERING SEPTUM.

FRAME	GALVANIZED STEEL
PROTECTIVE MESH	ON BOTH SIDES: ELECTROWELDED GALVANIZED STEEL WIRE
FILTERING SEPTUM	PROGRESSIVE TYPE SYNTHETIC POLYESTER MEDIA
REACTION TO FIRE	F1 DIN 53438
NF-F-16-101 (on request)	M1
EFFICIENCY CLASS CEN EN 779	G2
EUROVENT CLASS	EU 4
ARRESTANCE ASHRAE 52.1.1992 Am	90%
INITIAL PRESSURE DROP	21 Pa
RECOMMENDED FINAL PRESSURE DROP	250 Pa
MAXIMUM PRESSURE DROP	400 Pa
MAXIMUM OPERATING TEMPERATURE	100°C
MAXIMUM RELATIVE HUMIDITY	100%
LEGEND OF DIMENSIONS	
<p>H HEIGHT</p> <p>B BASE</p> <p>T CELL THICKNESS</p>	

Reference drawing: vefim_celle_piane

H (mm)	DIMENSIONS (mm)		PRICE (€/m ²)
	B (mm)	T (mm)	
Da 100 a 1600	Da 100 a 230	3 - 5 - 6 - 8 - 10	a.r.

DIFFERENT DIMENSIONS OR VERSIONS ARE AVAILABLE ON REQUEST

Vefim S.r.l. reserves the right to update without notice the characteristics described above.
This document may not be reproduced, transcribed, or translated (in part or in full) without specific written permission by Vefim S.r.l as provided for by law.